


Pendant Mounting Cover for PL High Bay (HBCAM20) Installation Instructions




SAFETY INSTRUCTIONS AND WARNINGS

- When using electrical equipment, basic safety precautions should always be observed
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved
- Installation should only be conducted by a qualified electrician in accordance with NEC and any relevant local building codes.
- Be certain electrical power is OFF before and during installation and maintenance.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects.

The information and product specifications contained in these instructions are based upon data believed to be accurate at the time of printing. This information is subject to change without notice and without incurring liability. If you have questions regarding specific product details, please contact us at 800-860-3392 or via email at customerservice@litetronics.com. To check for an updated version of these instructions, please visit www.litetronics.com.

WHAT COMES IN THE BOX

The following parts are included:





(1) Pendant Mounting Cover with gasket

REQUIRED TOOLS

5 mm Metric Allen wrench for mounting cover
Wire stripper
Wire cutter


WIRING DIAGRAMS

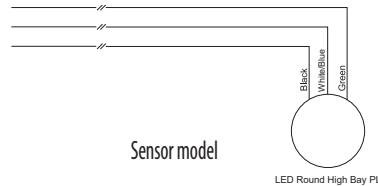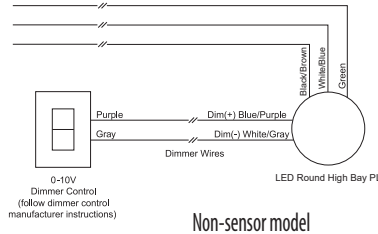

INSTRUCTIONS

Before installation, carefully remove all parts from the packaging. Inspect product for defects due to shipping.


1. Loosen 6 screws around the perimeter of the existing hook mounting plate and remove the plate (figure 1)

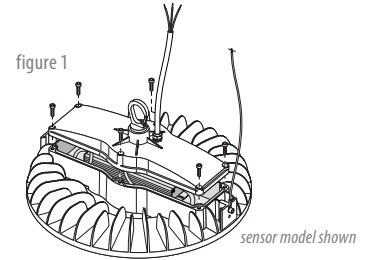

2. Wiring

For non-sensor model, run input lines (120-277V) and 0-10V dimming wires up through pendant mounting hole (figure 2), then connect input line wire. Refer to wiring diagrams. **Do not disconnect (5-hole) connector wires.**

For sensor model, run only input lines (120-277V) up through pendant mounting hole (figure 2), then connect input line wire. Refer to wiring diagrams. **Do not disconnect (5-hole) connector wires.**

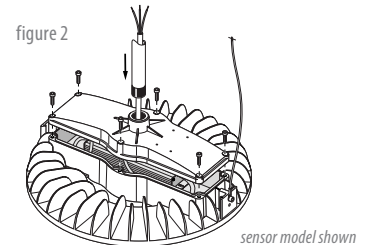

3. Close and secure the new plate to the fixture. Ensure gasket is in place to guarantee seal is water proof.