


## Test Remote for LED fixtures with integrated EBB

### Operation Instructions

Part # TR01

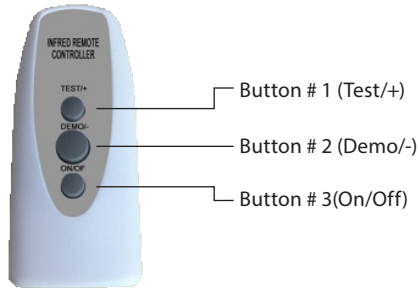

### Application Instructions

- Once installed, the battery must be allowed to charge for 24 hours.
- When power outage occurs, emergency battery backup will last for 90 minutes.
- The red indicator light will appear and stay on until power is restored.
- When in emergency mode with less than 30 minutes of battery time remaining, the indicator light will flash red to warn of low battery.
- When power is restored, the emergency battery will begin to recharge.
- When the indicator light is off, the battery is charging. If the indicator light is on during normal operation, or is flashing, there could be a problem with the battery or charging circuit.

### Instructions for Remote Control

**Please note:** Remote must be pointed at red indicator light and be within a 45 degree angle to receive a signal/command. Remote needs two AAA batteries to operate (not included).

**Button 1 (Test/+):** In an emergency, press this button. The light will switch to emergency state) for 3 seconds and the indicator will turn red. After 3 seconds, the fixture will return to normal operation.

**Button 2 (Demo/-):** To demonstrate the emergency functionality, turn the fixture on to normal operation. Press the Demo button first, then press the ON/OFF button. The fixture will switch to emergency state. Repeat this operation and the fixture will return to normal operation.

**Button 3 (ON/OFF):** For the emergency battery backup automatic discharge function, press this button and hold for 3 seconds while the fixture is in normal operation. The indicator light will turn red and keep flashing will start the every three months automatic discharge function. And Press it for 3s again, the indicator light turns Red and flash once, will close the every three months automatic discharge function; Standard setting of this function is closed)

