

LITETRONICS®

LED Wrap Fixture

Installation Instructions

Ordering Code: WF Tunable Series

WHAT COMES IN THE BOX

- (1) LED Wrap Fixture
- (1) Mounting Plate
- (1) Installation instructions
- (4) Mounting screws and anchors

TOOLS NEEDED

- Wire Stripper
- Wire Cutter
- Phillips Screwdriver
- Step Ladder



SAFETY INSTRUCTIONS AND WARNINGS

When using electrical equipment, basic safety precautions should always be observed. Read and follow all safety instructions.

- Installation should only be conducted by a qualified electrician in accordance with NEC and any relevant local building codes.
- Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- Be certain electrical power is OFF before and during installation and maintenance.
- Fixtures must be connected to a wiring system with an equipment-grounding conductor.
- Make sure the supply voltage is the same as the rated luminaire fixtures voltage.
- Only those open holes indicated in the photographs and/or drawings may be made or altered as a result of this kit strip installation. Do not leave any other open holes in an enclosure of wiring or electrical components.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects.
- Suitable for damp locations.

INSTALLATION

BEFORE BEGINNING INSTALLATION, TURN OFF POWER AT THE CIRCUIT BREAKER.

1. Remove the fixture, mounting plate and hardware from the box.
2. First, install the mounting plate to the ceiling surface. Locate the surface mounting holes, then raise the plate into place and drive two mounting screws directly into the surface/anchors at each end. See figure A.
 - For reference, mounting holes are spaced 40.9" apart (L) and 3.9" apart (W).



3. Before attaching the fixture to the mounting plate, find the wattage/CCT slide switch on the side of the fixture and select the preferred wattage and color temperature.

Wattage settings:

- 4' fixture: 40W (5,200 lumens) | 30W (3,900 lumens) | 25W (3,250 lumens) | 15W (1,950 lumens)


CCT settings:

- 5000K | 4000K | 3500K

4. Now you can attach and hang the fixture from the mounting plate using the two suspension cables and clips found on each end of the fixture. Make sure the fixture is oriented to match up with the direction of the mounting hooks.
5. Once the fixture is hung, make wiring connections using the attached luminaire quick connect. Insert the input wires into the male end of the quick connector.

Black = AC Line White = AC Neutral Green = Ground

6. Next, close the fixture by raising the lamp up to the mounting plate. Use the mounting hooks on each end of the plate to secure the fixture.
7. Restore power and your installation is complete.

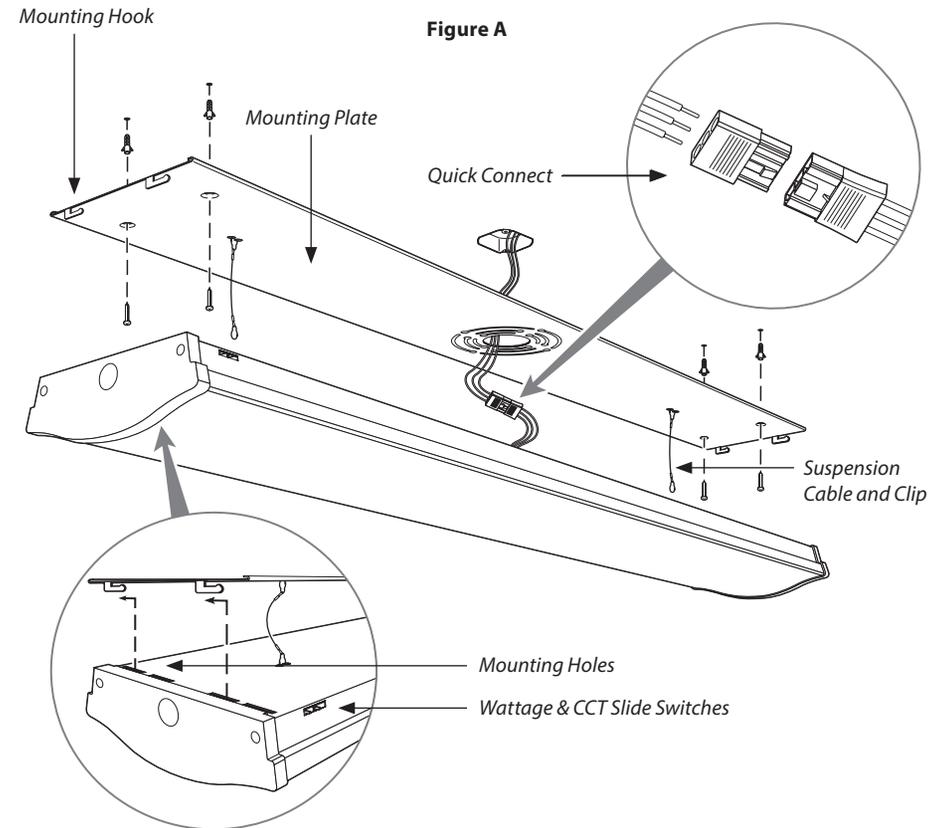

Thank you for choosing

LITETRONICS®

6969 W. 73rd Street
Bedford Park, IL 60638

www.Litetronics.com

CustomerService@Litetronics.com or 1-800-860-3392



The information and product specifications contained in these instructions are based upon data believed to be accurate at the time of printing. This information is subject to change without notice and without incurring liability. If you have questions regarding specific product details, please contact us at 800-860-3392 or via email at customerservice@litetronics.com.

To check for an updated version of these instructions, please visit www.litetronics.com.

1/11/21