

## LED STRIP FIXTURE



The Litetronics LED Strip Fixture features a diffuser lens with a sleek look that provides uniform light, 130 lumens per watt and 0-10V dimming. Plus, with a 100,000-hour rated life and ten-year warranty, you can use our fixture 14 hours/day for over 20 years. All the while, your investment be paying for itself with reduced maintenance, replacement and energy costs.

You will see saving benefits in our LED Strip Fixture almost immediately. It is designed for fast and easy installation. After you secure the lightweight frame to the ceiling, the LEDs, driver and lens assembly can be latched to the frame in an ideal position for quick, hands-free connection of the exposed wires. All that is left after connecting the wiring is to swing the assembly into final position and screw it together.

The Litetronics 4' and 8' LED Strip Fixtures are the easy way to upgrade the appearance and efficiency of your 1' x 4' fluorescent lighting.

### KEY FEATURES/BENEFITS

- 4' & 8' models
- DLC Premium listed models
- 100,000-hour rated life
- 10-year warranty
- Damp location rated
- Universal 120-277V
- Shatterproof; safe for food service applications
- 0-10V Dimming
- For single or continuous row mounting
- Available with suspended mount accessories

### MARKETS

- Healthcare and hospitals
- Schools and universities
- Sports facilities & gyms
- Retail
- Warehouse

### APPLICATIONS


- Retail
- Corridors
- Task areas
- Aisles
- Cove lighting



# SPECIFICATIONS

**Average Rated Life:** 100,000-hours  
**Warranty:** 10-years  
**Operating Temperature:** -4°F to 113°F  
**CRI:** 80  
**Input Voltage:** 120-277V  
**Power Factor:** ≥0.95  
**Beam Angle:** 110°

**Dimming:** 0-10V  
**UL/cUL listed:** Yes  
**ROHS compliant:** Yes  
**Location Rating:** Damp  
**DLC Rating:** Premium

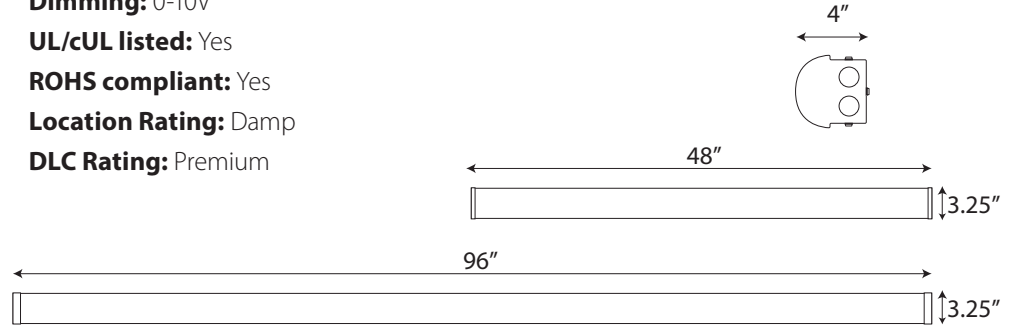

# ORDERING INFORMATION


4'

| WATTS | VOLTS   | DESCRIPTION                        | ORDERING CODE | CCT (K) | LUMENS |
|-------|---------|------------------------------------|---------------|---------|--------|
| 24    | 120-277 | 24W 4FT LED STRIP FIXTURE QC 3500K | SF24UQS435DL  | 3500    | 3,120  |
|       |         | 24W 4FT LED STRIP FIXTURE QC 4000K | SF24UQS440DL  | 4000    |        |
| 40    |         | 40W 4FT LED STRIP FIXTURE QC 3500K | SF40UQS435DL  | 3500    | 5,200  |
|       |         | 40W 4FT LED STRIP FIXTURE QC 4000K | SF40UQS440DL  | 4000    |        |
|       |         | 40W 4FT LED STRIP FIXTURE QC 5000K | SF40UQS450DL  | 5000    |        |

8'


| WATTS | VOLTS   | DESCRIPTION                        | ORDERING CODE | CCT (K) | LUMENS |
|-------|---------|------------------------------------|---------------|---------|--------|
| 50    | 120-277 | 50W 8FT LED STRIP FIXTURE QC 3500K | SF50UQS835DL  | 3500    | 6,500  |
|       |         | 50W 8FT LED STRIP FIXTURE QC 4000K | SF50UQS840DL  | 4000    |        |
|       |         | 50W 8FT LED STRIP FIXTURE QC 5000K | SF50UQS850DL  | 5000    |        |
| 64    |         | 64W 8FT LED STRIP FIXTURE QC 3500K | SF64UQS835DL  | 3500    | 8,320  |
|       |         | 64W 8FT LED STRIP FIXTURE QC 4000K | SF64UQS840DL  | 4000    |        |
|       |         | 64W 8FT LED STRIP FIXTURE QC 5000K | SF64UQS850DL  | 5000    |        |

# PRODUCT OVERVIEW

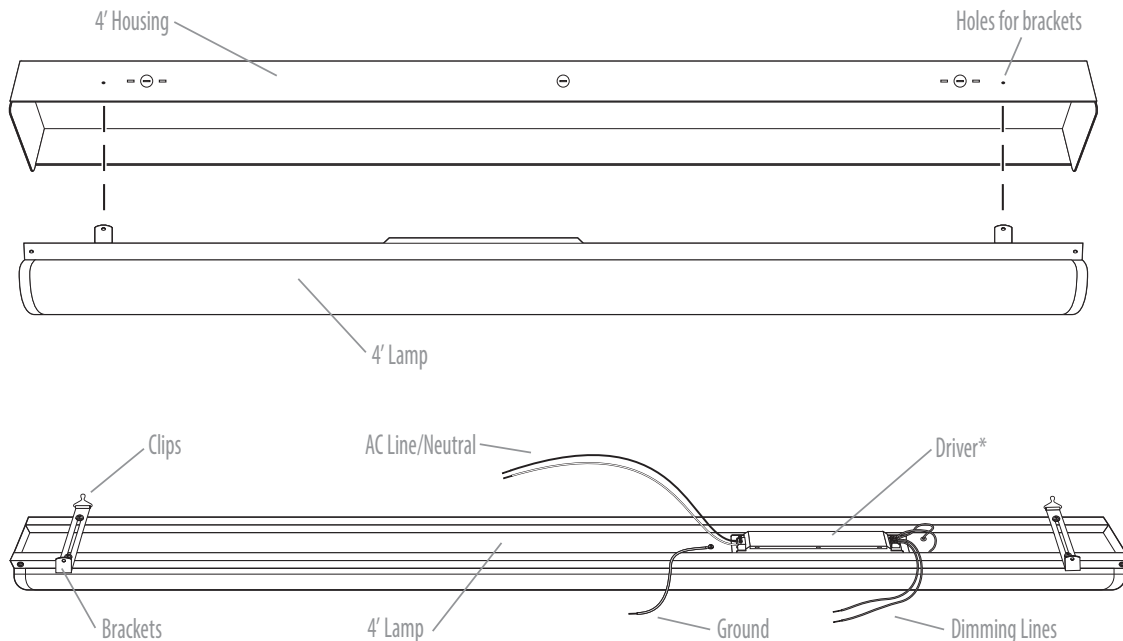


# ACCESSORIES

SFAM01

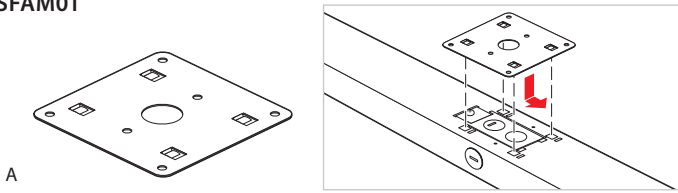


SFAM02

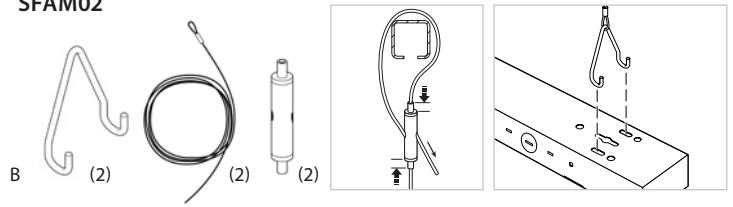


| IMAGE | WEIGHT RATING | DESCRIPTION                        | ORDERING CODE | ACCESSORY USE  |
|-------|---------------|------------------------------------|---------------|--|
| A     | -             | STRIP FIXTURE JUNCTION MOUNT KIT   | SFAM01        | Used to mount 4' & 8' Strip Fixtures to junction box   |
| B     | 25LBS         | STRIP FIXTURE SUSPENSION MOUNT KIT | SFAM02        | Used to suspend 4' & 8' Strip Fixtures from ceiling<br>NOTE: Two kits needed for 8' assembly. Cable is 5'. |

SFAM03




SFAM04




| IMAGE | DESCRIPTION   | ORDERING CODE | ACCESSORY USE   |
|-------|---|---------------|---|
| C     | STRIP FIXTURE T-GRID FLUSH MOUNT KIT                | SFAM03        | Used to mount 4' & 8' Strip Fixtures to T-grid ceiling                    |
| D     | STRIP FIXTURE 30 DEGREE ANGLE WALL WASHER MOUNT KIT | SFAM04        | Used to mount 4' & 8' Strip Fixtures to T-grid ceiling at 30 degree angle |

SFAM06, SFAM07

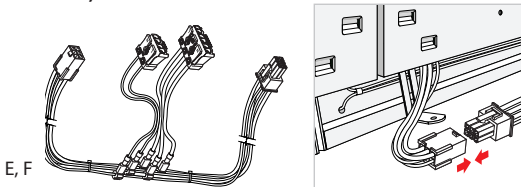

SFAM08

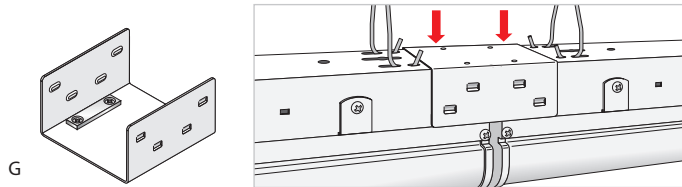

| IMAGE | DESCRIPTION                                      | ORDERING CODE | ACCESSORY USE   |
|-------|--|---------------|---|
| E     | STRIP FIXTURE 4' 14G WIRE HARNESS CONNECTING KIT | SFAM06        | Used to connect two or more strip fixtures together from one power source |
| F     | STRIP FIXTURE 8' 14G WIRE HARNESS CONNECTING KIT | SFAM07        | Used to connect two or more strip fixtures together from one power source |
| G     | STRIP FIXTURE ALIGNMENT BRACKET                  | SFAM08        | Used to align two strip fixtures together                                 |

SFAS50



| IMAGE | DESCRIPTION                                    | ORDERING CODE | ACCESSORY USE   |
|-------|--|---------------|---|
| H     | STRIP FIXTURE KIT MOTION SENSOR IP65 1-10V DIM | SFAS50        | Microwave motion sensor, IP65, 1-10V and rating 400W@120Vac, 800W@220-277Vac (inductive) and HF system 5.8GHz±75MHz, ISM wave band. For indoor use only |