

## LED VAPOR TIGHT STRIP



### IP67 and IK10 ratings plus corrosion resistance make this the toughest fixture around.

Uniquely rugged and slim, the Litetronics LED Vapor Tight Slim Strip Light works where few other lighting products can. Only 1.5 inches in diameter, this DLC Premium product is both IP67 and IK10 rated. Suitable for both indoor and outdoor use, this corrosion-resistant fixture is well-suited for harsh industrial environments like food-service and factory environments as well as warehouses.

Offering 130 lumens per watt, and a beam angle of 120°, the Vapor Tight Slim Strip Light features a highly transparent cover. With compact stainless steel hardware for mounting the fixture on walls or ceilings, the product is well-suited for applications where only limited space is available.

#### KEY FEATURES

- IP67 Rated
- NSF rated
- DLC Premium listed
- IK10 Rated
- Connectability between fixtures
- 4' & 8' models
- 130 lpw
- 5 year warranty
- Corrosion resistant
- Non-dimmable
- 5' cable attached
- 100-277V
- Stainless steel wall/ceiling mount accessories standard

#### MARKETS

- Commercial
- Warehouse
- Retail
- Schools
- Health Care
- Gas Stations
- Factories

#### APPLICATIONS

- Corridor Lighting
- Halls
- Storage Areas
- Stairways
- Parking Lots
- Car Washes



# LED VAPOR TIGHT STRIP

## SPECIFICATIONS

**Average Rated Life:** 50,000H

**CRI:** 80

**Mounting:** Stainless steel brackets

**Power Factor:** ≥0.91



**Volts:** 120-277

**Beam Angle:** 120°

**IP Rating:** 67

**IK Rating:** 10

**Operating Temperature:** -22°F to 113°F

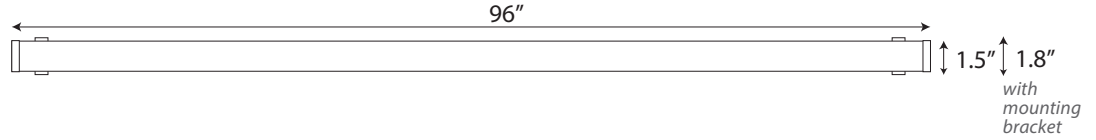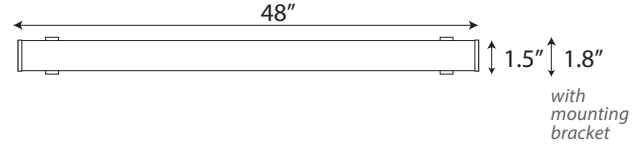


## CONNECTABILITY

The 4' model can be daisy chained, enabling coverage of a larger area from one power source.

Max number of fixtures that can be connected:

WATTS	MAX QUANTITY IN DAISY CHAIN
30	33

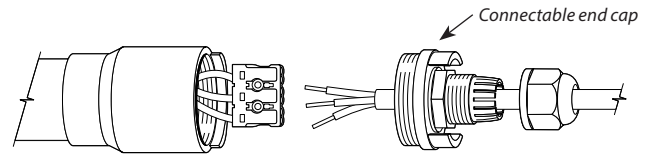


**Above:** The stock end cap has been removed and replaced with the connectable end cap, facilitating the connection between two fixtures while maintaining the same protection from the elements.

## ORDERING INFORMATION

TYPE	WATTS	VOLTS	ORDERING CODE	DESCRIPTION	CCT (K)	LUMENS
4'	30	120-277	VT30US440P	30W 4' LED VAPOR TIGHT 120-277V 4000K PREM	4000	3,900
			VT30US450P	30W 4' LED VAPOR TIGHT 120-277V 5000K PREM	5000	
8'	55		VT55US840P	55W 8' LED VAPOR TIGHT 120-277V 4000K PREM	4000	7,150
			VT55US850P	55W 8' LED VAPOR TIGHT 120-277V 5000K PREM	5000	

## ACCESSORIES

VTAM01



VTAM02




IMAGE	ORDERING CODE	DESCRIPTION	ACCESSORY USE
A	VTAM01	4' VAPOR TIGHT SUSPENSION MOUNT KIT	Used to suspend 4' Vapor Tight light
B	VTAM02	8' VAPOR TIGHT SUSPENSION MOUNT KIT	Used to suspend 8' Vapor Tight light