

LED GARAGE LIGHT



The LED Garage Light offers an affordable option for facility managers to upgrade parking garage lighting to LED, creating better visibility and making it an overall safer environment for visitors, while significantly reducing operating and maintenance costs.

Certified as a DLC Premium product, this luminaire goes above and beyond the minimum rating, delivering up to 133 LMW from both the 39W and 59W models. It's high efficiency combined with polycarbonate Fresnel lens and 160° beam angle ensure wide-spreading, uniform light, potentially decreasing the number of fixtures needed in a space. The optional microwave motion sensor takes savings a step further, enabling occupancy sensing and daylight harvesting, each fully programmable on unit or remotely via a remote control accessory.

This unit is designed for easy installation, with surface or pendant mounting capabilities. The easy-mount connecting plate enables hands-free wiring for surface mounting, saving effort, time and cost on the installation process.

KEY FEATURES

- DLC Premium (133 LPW)
- Programmable sensor with occupancy and daylight sensing (Optional)
- Sensor remote control
- IP54 wet rated
- 0-10V Dimming (dims to 6%)
- Polycarbonate Fresnel lens
- 5 year warranty
- 50,000 hour rated life
- Easy installation for surface or pendant mounting
- Emergency battery backup available

MARKETS

- Parking Garages
- Covered walkways
- Entranceways
- Canopies
- Soffits

APPLICATIONS

- Commercial
- Industrial
- Residential



LED GARAGE LIGHT

SPECIFICATIONS

Average Rated Life: 50,000H

CRI: 83

Power Factor: ≥0.95



Mounting: Surface or pendant

Beam Angle: 160°

Operating Temperature: -4°F to 113°F

Volts: 120-277

Dimming: 0-10V

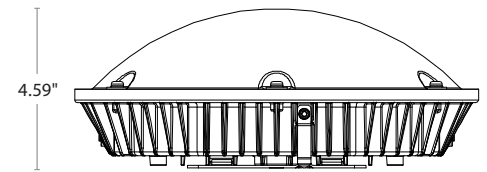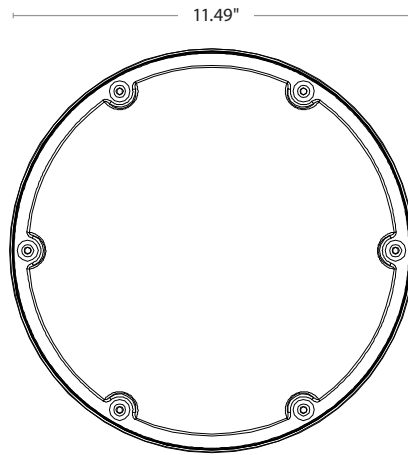

ORDERING INFORMATION

STANDARD MODEL WITHOUT SENSOR

| WATTS | ORDERING CODE | DESCRIPTION | CCT (K) | LUMINAIRE LUMENS |
|-------|---------------|--|---------|------------------|
| 39 | GL39UR40DLP | 39W LED Garage Light Round 120-277V 4000K 0-10V DIM PREM | 4000 | 5200 |
| | GL39UR50DLP | 39W LED Garage Light Round 120-277V 5000K 0-10V DIM PREM | 5000 | |
| 59 | GL59UR40DLP | 59W LED Garage Light Round 120-277V 4000K 0-10V DIM PREM | 4000 | 7800 |
| | GL59UR50DLP | 59W LED Garage Light Round 120-277V 5000K 0-10V DIM PREM | 5000 | |

MODEL WITH SENSOR

| WATTS | ORDERING CODE | DESCRIPTION | CCT (K) | LUMINAIRE LUMENS |
|-------|---------------|--|---------|------------------|
| 59 | GL59UR40DLPS | 59W LED Garage Light Round 120-277V 4000K 0-10V DIM PREM W/ SENSOR | 4000 | 7800 |
| | GL59UR50DLPS | 59W LED Garage Light Round 120-277V 5000K 0-10V DIM PREM W/ SENSOR | 5000 | |

ACCESSORIES

SENSOR REMOTE CONTROL

| ORDERING CODE | DESCRIPTION | USAGE |
|---------------|--------------------------------|---------------------------------|
| SCR051 | Microwave Motion Sensor remote | Remotely adjust sensor settings |



EMERGENCY BATTERY BACKUP

| MODEL # | DESCRIPTION | USAGE |
|---------|-----------------------------------|---|
| EB10 | 10W Emergency Battery Backup | Supplies battery backup to an individual fixture for up to 90 minutes. <u>Must be ordered with EBCM or EBAM indicator module.</u> |
| EBCM | Ceiling-mounted Indicator Module | In grid ceiling applications, this unit connects to the EB10 and is recess mounted in an adjacent panel where it displays the unit's current status of operation. |
| EBAM | Adhesive-mounted Indicator Module | In drywall/open ceiling applications, this unit connects to the EB10 and is mounted via adhesive, where it displays the unit's current status of operation. |

