

LED STRIP RETROFIT



Our LED Strip Retrofit gives you the polished look of a new diffuser lens without the hassle of installing new fixtures. It can be assembled in single or continuous row mounting for seamless lighting enabled by connectability and illuminated end caps.

The process is quick and easy. Clips and adjustable brackets allow for a universal retrofit of narrow and wide strip fixtures. No need to dispose of existing housing or touch up ceiling paint after install.

KEY FEATURES/BENEFITS

- DLC Premium (130 LPW)
- Suitable for damp locations
- Safe for food service applications
- Adjustable brackets fit 2.75" - 5" wide housings
- 0-10V dimming*
- Easy upgrade of existing fixtures
- No need to repaint
- 100,000-hour rated life
- 10-year warranty

MARKETS

- Healthcare and hospitals
- Schools and universities
- Sports facilities & gyms
- Retail

APPLICATIONS

- Retail
- Corridors
- Task areas
- Aisles



* See [Dimmer Compatibility list](#) for compatible dimmer models.

LED STRIP RETROFIT

SPECIFICATIONS

Average Rated Life: 100,000H

CRI: 80


Power Factor: ≥ 0.95

Beam Angle: 110°


Operating Temperature: -4°F to 113°F

Volts: 120-277


Dimming: 0-10V

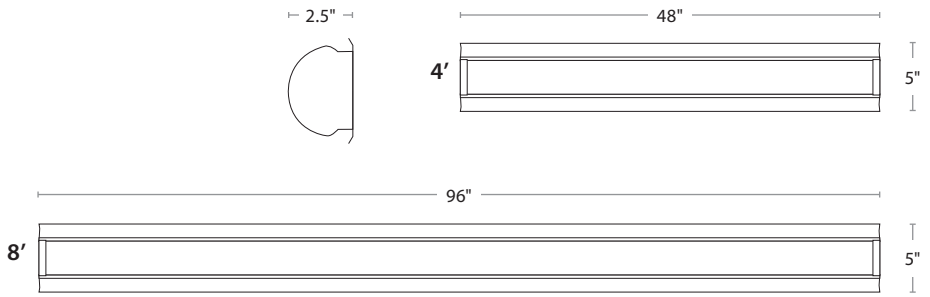


Special Features for Easy Install:

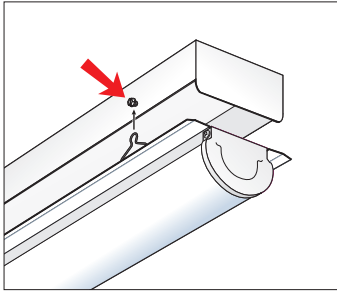

Mounting hooks easily help hang retrofit to become hands free to finish installation.

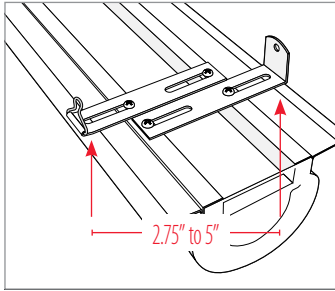

Hands are free to affix retrofit mounting brackets into place. Groove in bracket reinforces strip wall for self-tapping screw insertion.

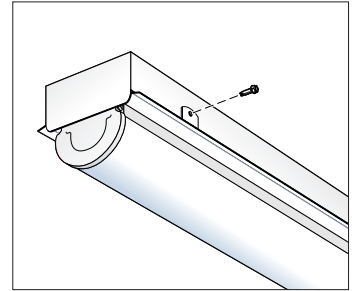

White mounting brackets attached to side of strip fixture for neat design.

ORDERING INFORMATION

4'

SIZE	WATTS	VOLTS	ORDERING CODE	DESCRIPTION	CCT (K)	LUMENS
4'	24	120-277	SR24UQS435DL	24W 4FT LED STRIP RETROFIT QC 3500K	3500	3,120
			SR24UQS440DL	24W 4FT LED STRIP RETROFIT QC 4000K	4000	3,120
			SR24UQS450DL	24W 4FT LED STRIP RETROFIT QC 5000K	5000	3,120
	30		SR30UQS435DI	30W 4FT LED STRIP RETROFIT QC 3500K	3500	3,900
			SR30UQS440DI	30W 4FT LED STRIP RETROFIT QC 4000K	4000	3,900
			SR30UQS450DI	30W 4FT LED STRIP RETROFIT QC 5000K	5000	3,900

8'

SIZE	WATTS	VOLTS	ORDERING CODE	DESCRIPTION	CCT (K)	LUMENS
8'	64	120-277	SR64UQS835DL	64W 8' LED STRIP RF QC 120-277V 3500K DIM	3500	8,320
			SR64UQS840DL	64W 8' LED STRIP RF QC 120-277V 4000K DIM	4000	8,320
			SR64UQS850DL	64W 8' LED STRIP RF QC 120-277V 5000K DIM	5000	8,320