

## LED VAPOR TIGHT STRIP



The LED Vapor Tight Slim Strip is a uniquely slim and durable industrial fixture well-suited for harsh environments both indoor and outdoor.

At only 1.5" in diameter, this compact fixture works well in tight spaces. It can be surface mounted to a ceiling or wall, or suspension mounted depending on the application. It can also be directly connected to 1/2" NPT conduit. The 4' model can be daisy chained (up to 33 units) to cover more ground from a single power source .

Designed for specifically hazardous environments, this vapor tight fixture provides protection against moisture, vapors or dust. It's IP67 and IK10 ratings guarantee it's durability in challenging applications. The fixture is also NSF rated, for use in food processing and food safe environments. Even the stainless steel mounting hardware is corrosion resistant, providing long term peace of mind that your LED lighting is up to task.

### KEY FEATURES

- IP67 and IK10 rated
- NSF rated
- Corrosion resistant (fixture and mounting hardware)
- DLC Premium (up to 130 LPW)
- Daisy chain up to 33 fixtures (4' model only)
- Direct connection to 1/2" NPT conduit
- 50,000-hour rated life
- 5 year warranty
- 5' cable attached

### MARKETS

- Commercial
- Warehouse
- Retail
- Schools
- Health Care
- Gas Stations
- Factories

### APPLICATIONS

- Corridor Lighting
- Halls
- Storage Areas
- Stairways
- Parking Lots
- Car Washes



# LED VAPOR TIGHT STRIP

## SPECIFICATIONS

**Average Rated Life:** 50,000H

**CRI:** 80

**Mounting:** Stainless steel brackets

**Power Factor:** ≥0.91

**Volts:** 120-277



**Beam Angle:** 120°

**IP Rating:** 67

**IK Rating:** 10

**Operating Temperature:** -22°F to 122°F (-30°C to 50°C)

**Dimming:** Non-dimmable

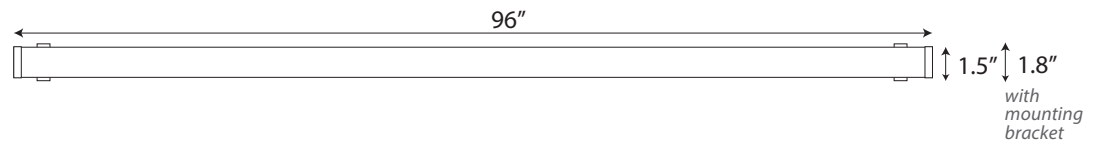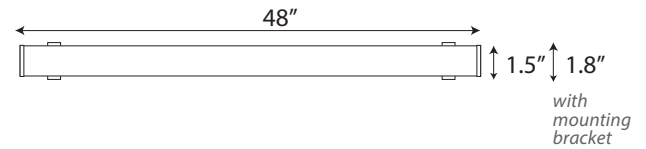


## CONNECTABILITY

The 4' model can be daisy chained, enabling coverage of a larger area from one power source.

*Please note: The 8' model cannot be daisy chained.*

Max number of 4' fixtures that can be connected:

WATTS	MAX QUANTITY IN DAISY CHAIN
30	33

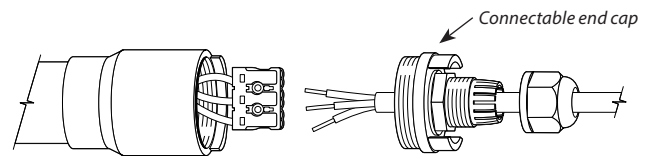


**Above:** The stock end cap has been removed and replaced with the connectable end cap, facilitating the connection between two fixtures while maintaining the same protection from the elements. This end cap also enables a direct connection to 1/2" NPT conduit.

## ORDERING INFORMATION

TYPE	WATTS	VOLTS	ORDERING CODE	DESCRIPTION	CCT (K)	LUMENS
4'	30	120-277	VT30US440P	30W 4' LED VAPOR TIGHT 120-277V 4000K PREM	4000	3,900
			VT30US450P	30W 4' LED VAPOR TIGHT 120-277V 5000K PREM	5000	
8'	55		VT55US840P	55W 8' LED VAPOR TIGHT 120-277V 4000K PREM	4000	7,150
			VT55US850P	55W 8' LED VAPOR TIGHT 120-277V 5000K PREM	5000	

## ACCESSORIES

VTAM01



VTAM02




IMAGE	ORDERING CODE	DESCRIPTION	ACCESSORY USE
A	VTAM01	4' VAPOR TIGHT SUSPENSION MOUNT KIT	Used to suspend 4' Vapor Tight light
B	VTAM02	8' VAPOR TIGHT SUSPENSION MOUNT KIT	Used to suspend 8' Vapor Tight light