


LITETRONICS®

LED Vapor Tight Slim Strip Light

Installation Instructions

For 4' and 8' LED Vapor Tight Slim Strip Light (VT Series)

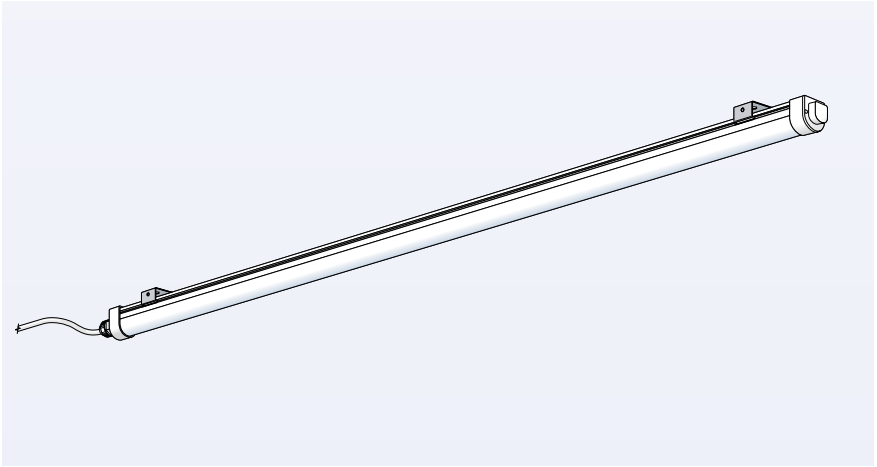

PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION

SAFETY INSTRUCTIONS AND WARNINGS

WARNING:

READ CAREFULLY BEFORE INSTALLING STRIP LIGHT. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

CRITICAL SAFETY INSTRUCTIONS:

Installation should only be conducted by a qualified electrician in accordance with NEC and any relevant local building codes.


Risk of fire or electric shock. Strip Light installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

Be certain electrical power is OFF before and during installation and maintenance.


Strip Lights must be connected to a wiring system with an equipment-grounding conductor.

Make sure the supply voltage is the same as the rated Strip Lights voltage.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects.

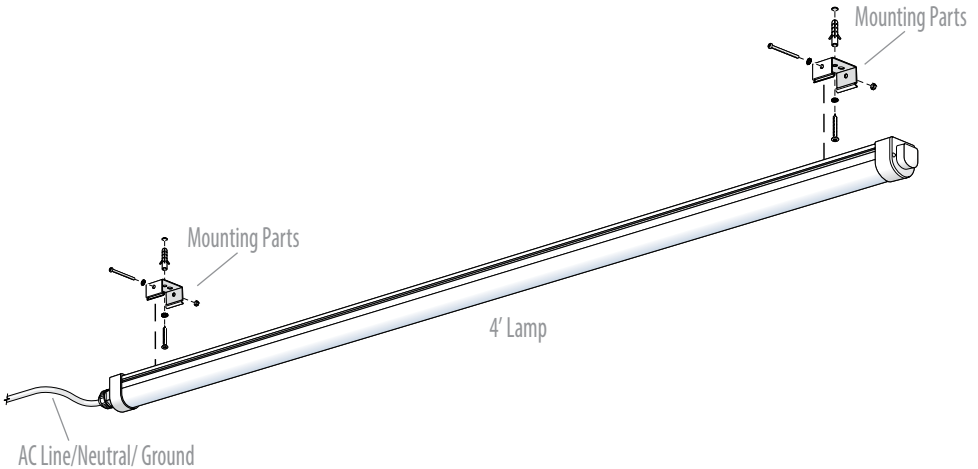


TOOLS TYPICALLY USED FOR INSTALLATIONS

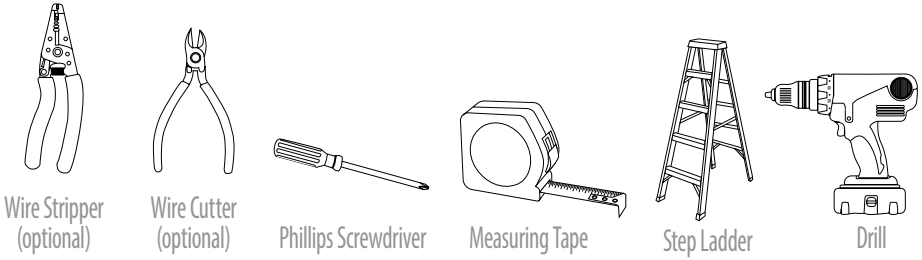

WHAT COMES IN THE BOX

LED Vapor Tight Slim Strip Light base product comes with following standard parts:

IMAGE	PART	4' QTY	8' QTY
A	LED Vapor Tight Slim Strip Light	1	1
B	Mounting Brackets	2	3
C	Anchors	2	3
D	Mounting Screws (#6 x 1 1/4")	2	3
E	Anti-spread Nuts	2	3
F	Anti-spread Screws (M3 x 40)	2	3
G	Tooth Lock Washers (M3)	2	3
H	Tooth Lock Washers (M4)	2	3
I	Installation Instructions	1	1

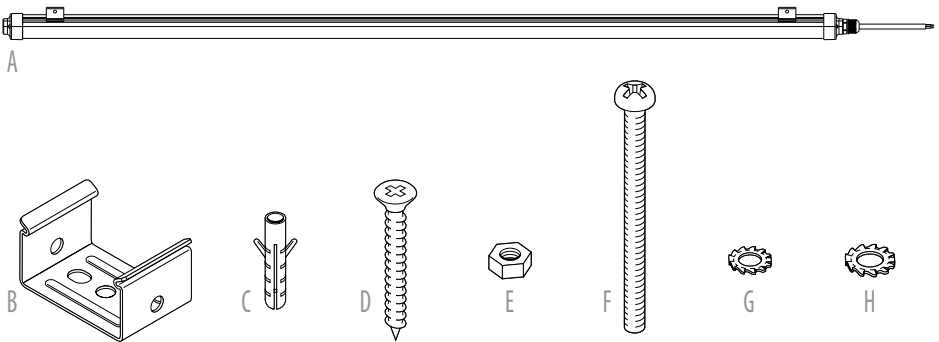


*Before Installation, carefully remove all parts from the packaging.
 Inspect product for defects due to shipping.*

Section 1

4' & 8' VAPOR TIGHT SLIM STRIP LIGHT SURFACE MOUNT INSTALLATION

READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

1. Turn off power at electrical panel.

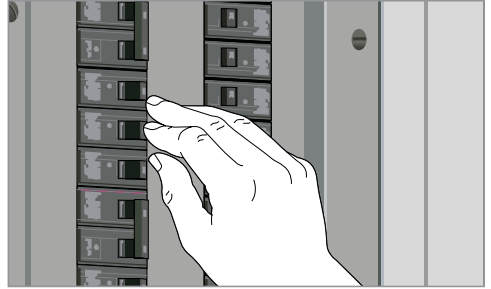


2. Determine mounting position and mark placement for brackets. Drill pilot holes for anchors.


Note:

For 4' Installation- 2 holes required. (Extreme ends)

For 8' Installation- 3 holes required. (Extreme ends & center)

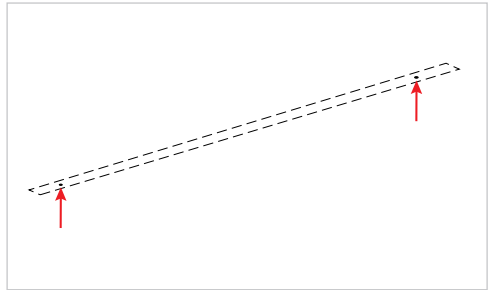


3. Insert the anchors into the surface by pressing firmly or gently hammering until anchors are level with surface.

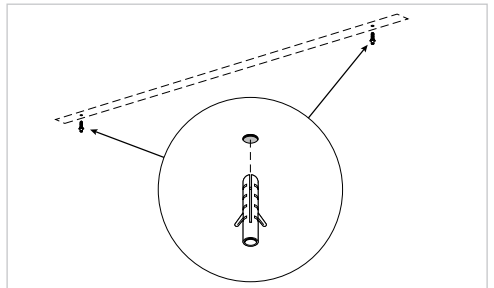


Section 1

4' & 8' VAPOR TIGHT SLIM STRIP LIGHT SURFACE MOUNT INSTALLATION


4. Place tooth lock washers (M4) over mounting screws (#6 x 1 1/4"), then through center hole of brackets and screw into anchors.

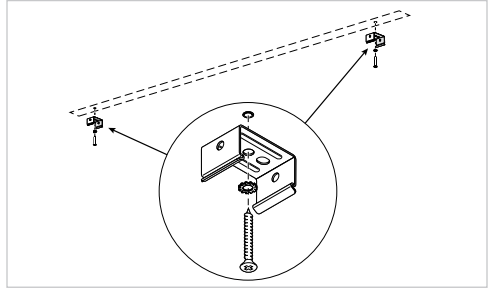

5. Tighten brackets down and be sure to align in same direction.

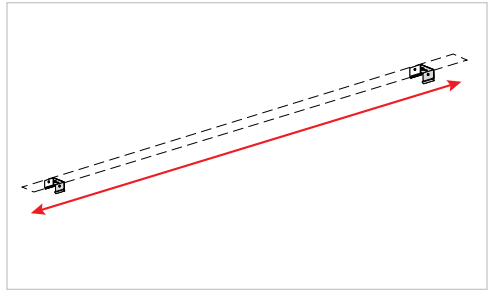

6. Place Vapor Tight Slim Strip Light into both brackets. They will snap into place. Slide into final position.

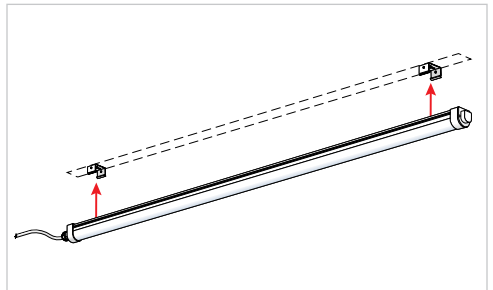


Section 1


4' & 8' VAPOR TIGHT SLIM STRIP LIGHT SURFACE MOUNT INSTALLATION

READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION


7. Use anti spread hardware to prevent fixture from moving after installation. Slide anti spread screw (M3 x 40) through tooth lock washers (M3). Then slide screw through holes in back of brackets.

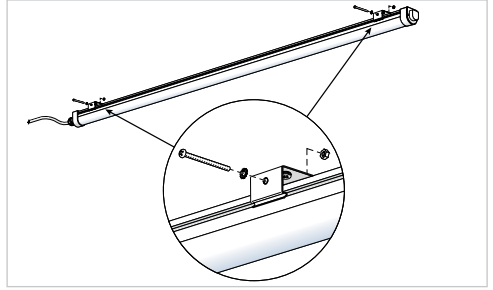

8. Thread anti spread nuts onto screws and tighten.

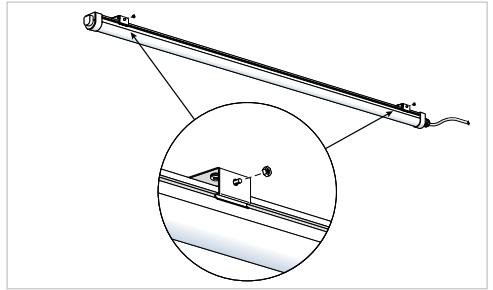


9. The fixture will now be firmly in place.

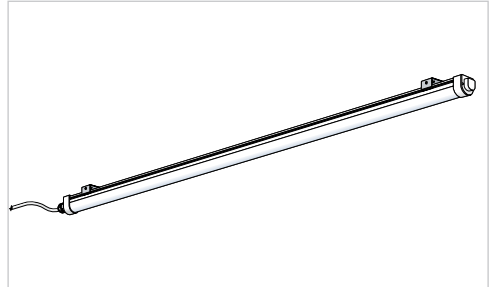

Section 1

4' & 8' VAPOR TIGHT SLIM STRIP LIGHT SURFACE MOUNT INSTALLATION

10. Using wire nuts (not included), connect incoming wires with fixture wires following wiring diagram below.

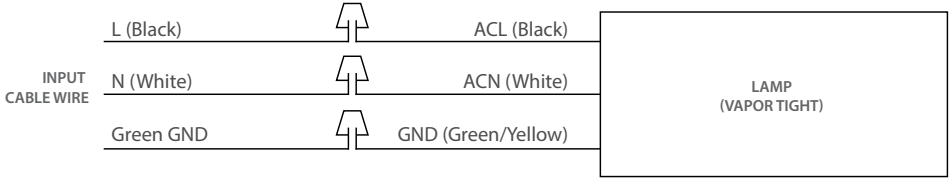

11. Turn on the power and you are done.

Thank you for choosing

LITETRONICS®

6969 W. 73rd Street
Bedford Park, IL 60638

WWW.LITETRONICS.COM

CustomerService@Litetronics.com or 1-800-860-3392

