


Suspension Mount Kit

Installation Instructions

For 1'x4', 2'x2', and 2'x4' sizes. Compatible with LED Light Panel and LED Volumetric Troffer products.

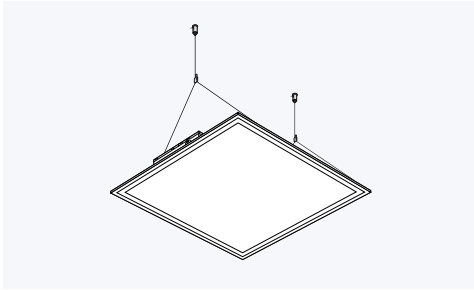

WHAT COMES IN THE BOX

The **PTAM211 & PTAM212** Suspension Mount Kit comes with the following standard parts:



(2) 5' Wires




(2) Ceiling Anchors and Screws




(2) Locking mounts

The **PTAM214** 2' X 4' Kit will come with 3 wires, 3 anchor/screw sets and 3 locking mounts.

Before beginning installation, carefully remove accessory parts from packaging, inspect and ensure all pieces are accounted for.




1. Determine placement for locking mount on ceiling.

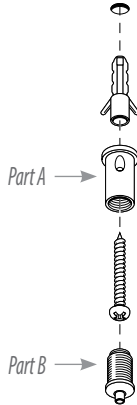


2. Secure and assemble locking mount to ceiling.

Install anchors in drywall. Attach Part A of locking mount to ceiling by inserting screw through Part A and tightening into anchor. Screw Part B of locking mount into Part A.



3. Hang Light Panel.

Insert wire up through bottom of locking mount. Tug wire to test/ensure security. Do this for all wires. Note: Connect lock end to release wires.

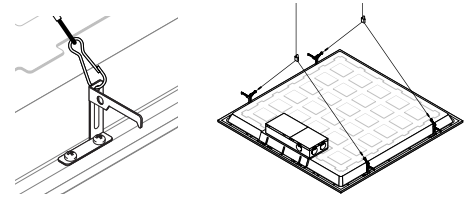

4. Attach clips to brackets on panel corners.

Once hung, adjust wire lengths to level as needed (Max length is 4.45' for 2X2 & 2X4 kit and 4.8' for 1X4 kit.) Cut excess wire.

5. Connect wiring based on the product Installation Instructions.