

# Vivid™

## LED Frame

Unique.

Bold.

Elegant.

Upscale.



**LITETRONICS®**



VERSATILE

*Easy to Install*

AESTHETIC

Sleek

Function/Performance

# Vivid™ LED Frame

*Illuminate Your Imagination*

Vivid LED Frame


is revolutionary,

a game changing

product.



VLFT2 - 2' x 2'

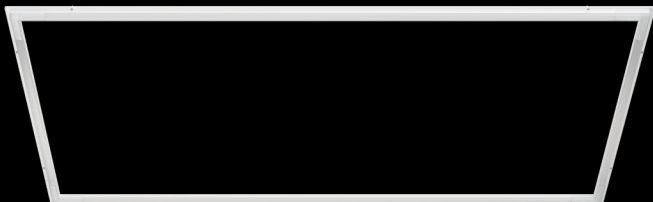

VLFT4 - 2' x 4'

## THE VIVID ADVANTAGE

Vivid combines sleek visual aesthetics with innovative design. Attractive price points and in-demand features deliver a unique and valuable solution that stands above the crowd.

In a highly competitive market, Vivid's advantages over the competition are tangible and significant. Vivid is a win for every stakeholder - from owners to installers, designers and distributors.



## MARKETS-APPLICATIONS

Car Dealerships

Commercial Offices

Corridors

Schools

Health Clubs


Hospitals

***And Much More***

## ONE PRODUCT....COUNTLESS OPTIONS

Vivid has the ability for the user to choose from three different color temperatures, (3500, 4000 and 5000). You can additionally choose between three wattage settings as well. For the 2'x2' product they are 18, 27 and 36. For the 2'x4' size they are 24, 34 and 45.

With three field adjustable color temperatures and wattage choices, Vivid can easily meet all your lighting needs, while minimizing the need for multiple products to serve the same purpose.

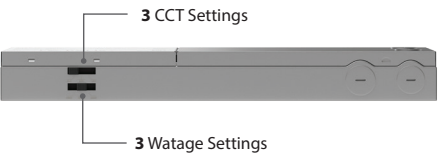

## FEATURES

- Selectable wattage: 2' x 4' product: 24/34/45
- Selectable wattage: 2' x 2' product: 18/27/36
- Selectable CCT (3500K, 4000K, 5000K)
- Size options: 2' x 4' or 2' x 2'
- DLC listing (pending)
- ETL Damp location rating (pending)
- 0-10V Dimming
- 50,000-hours rated life
- 5-year warranty
- Compatible with Emergency Battery Backup
- UGR: 2'x4' product: < 22 at all wattages
- UGR: 2'x2' product: 28-30 depending on wattage







## INSTALLATION SIMPLIFIED

- Easy to install. Quick and simple process allows units to be installed while minimizing time and material costs.
- Suitable for virtually all indoor applications.
- Vivid can easily be t-grid mounted.
- Perfect for retrofit or new construction projects.



## COMPLIANCE AND APPROVALS



## SPECIFICATIONS

**Average rated life:** 50,000 hours (@L70)

**Warranty:** 5 years

**Operating temp:** 32°F - 104°F

**Surge protection:** 2.5KV

**Input voltage:** 120-277V

**Input frequency:** 50/60Hz

**Power factor:** ≥0.95

**THD:** ≤20

**CRI:** 80

**Beam angle:** 110°

**Diffuser type:** Polycarbonate frosted

**Dimming:** 0-10VDC ANSI C137.x compliant

**Minimum dimming:** 0% of rated lumen LED drive current

**Location rating:** Damp

**ETL listed:** Pending

**RoHS compliant:** Yes

**DLC rating:** 2'x4' Premium 2'x2' Pending

**IC rated:** Yes

**IP rating:** 20

**LPW:** 125





## WATTAGE AND LUMENS

### Model # VLFT2

#### Size

2' x 2'

#### Wattages

18 | 27 | 36

#### Lumens

2250 | 3375 | 4500

#### CCT

3500 | 4000 | 5000

### Model # VLFT4

#### Size

2' x 4'

#### Wattages

24 | 34 | 45

#### Lumens

3000 | 4250 | 5625

#### CCT

3500 | 4000 | 5000

## Vivid™ LED Frame

- Visually elegant and attractive appearance.
- Incredible value due to outstandingly competitive price points.
- Feature packed with versatility for indoor applications with selectable CCT and Wattage.
- Unique and efficient design is easy to specify, ship/store, install, and enjoy.

# Vivid™

LED Frame



## FOR MORE INFORMATION

Go to [Litetronics.com/vivid](https://Litetronics.com/vivid)

Call 1-800-860-3392

or

Call your agent for a free Demo  
and learn about our 60 day FREE trial.

# LITE<sup>®</sup>TRONICS