

PROJECT:		
CATALOG #		
TYPE:		DATE:

PLUG-IN MICROWAVE SENSOR

FOR HBC/LHB/HBS (GEN 3)/GL80/AL/FL/WPC/WPT

DESCRIPTION

This sensor enables wireless control of fixtures, or groups of fixtures, through the LiteSmart mobile app.

This smart plug-in sensor is compatible with Litetronics HBS Round High Bay SL / GL80 Square Garage Light / Outdoor Area Lights / Outdoor Flood Lights / Outdoor Wall Packs.



APPLICATIONS

- Car dealership
- Schools, campuses, day care
- Parking lots
- Commercial
- Transportation hubs
- Trucking Depots
- Retail
- Event Centers
- Industrial yards and lots
- Warehouse/storage
- Gymnasiums
- Garages
- High ceilings
- Task lighting
- Building facades
- Loading dock and entry doors
- Safety & security lighting
- Schools, campuses
- Storage rental facilities
- Multi-family, apartment complex
- Columns & porte cochere
- Covered walkways
- Entranceways
- Canopies
- Soffits

FEATURES


- Plug-In
- -22°F to 131°F (-30°C to 55°C)
- Daylight Harvesting
- Occupancy Sensing
- Bluetooth transmit 100 ft. Max
- Maximum operating height 40 ft. Max
- Detection coverage area 40-80 ft. Max

ORDERING INFORMATION

Listed below are the max load based mains voltage.

ORDERING CODE	DESCRIPTION	BASE	VOLTS
SC008	Plug-In Bluetooth PIR Sensor with IR	Plug-In	12V DC

SENSOR COVERAGE

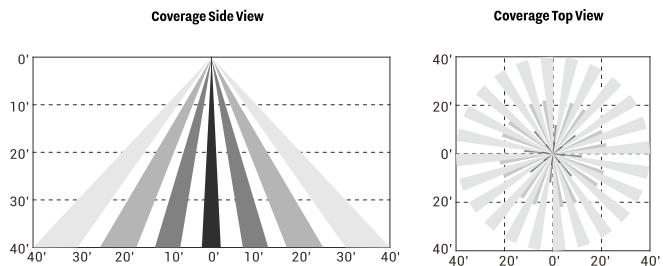

CERTIFICATIONS

