

Thank you for choosing
LITETRONICS®

6969 W. 73rd Street
Bedford Park, IL 60638
WWW.LITETRONICS.COM

CustomerService@Litetronics.com or 1-800-860-3392



The information and product specifications contained in these instructions are based upon data believed to be accurate at the time of printing. This information is subject to change without notice and without incurring liability. If you have questions regarding specific product details, please contact us at 800-860-3392 or via email at customerservice@litetronics.com. To check for an updated version of these instructions, please visit www.litetronics.com.


LITETRONICS®

Trunnion Mount

Area Light Pro

(ALPATM, ALPABTM, ALPAWTM)

Installation Instructions

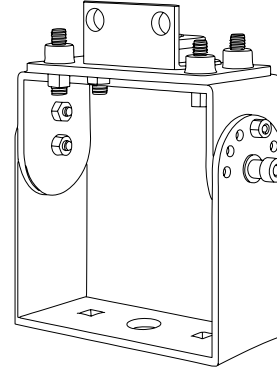

SAFETY INSTRUCTIONS AND WARNINGS

- When using electrical equipment, basic safety precautions should always be observed.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Installation should only be conducted by a qualified electrician in accordance with NEC and any relevant local building codes.
- Be certain electrical power is OFF before and during installation and maintenance.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects.

WHAT COMES IN THE BOX

Trunnion
Installation Instructions
M8 * 22mm Screws (x2)

REQUIRED TOOLS


Allen Wrench

INSTRUCTIONS


Before Installation, carefully remove all parts from the packaging. Inspect product for defects due to shipping. **Always turn off the power supply from main circuit breaker first!**

TRUNNION MOUNT INSTALLATION

1. Secure the trunnion mount in place using expansion bolts (not included). (Fig.1)
2. Ensure the mount is firmly attached and level before proceeding.




3. Feed the fixture wires through the central opening of the trunnion mount. Make sure the wiring is not pinched or exposed to sharp edges.
4. Lock the Trunnion Mount to the fixture by sliding the Quick Slide onto the corresponding slot of the fixture. Once the holes are lined up, tighten the fixture to the mount with included M8 screws. (Fig.2)
5. Finish the wire connection accordingly (refer to Area Light Pro installation instructions for wiring diagram).

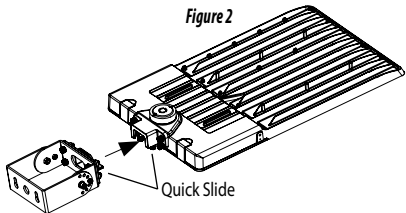

6. Loosen the M8 and unscrew M5 to adjust the angle.
7. Align the fixture to required angle by placing the M5 screw into the desired angle hole and tightening the M8 screw to secure the fixture. (Fig.3)
8. Turn power back on.

Note: Adjustable angle is 0~+/-90°. (Fig.3)

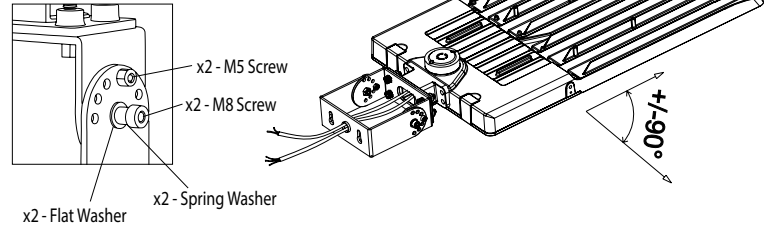

TRUNNION MOUNT HOLE PATTERN

