

PLUG-IN PIR SENSOR

FOR UP TO 50 FT. MAX MOUNTING HEIGHT

PROJECT:	
CATALOG #	
TYPE:	DATE:

DESCRIPTION

When utilized with select fixtures, the SC016 enables occupancy sensing and daylight harvesting. Settings can be easily adjusted via remote control (Part# SCR053).

This plug-in sensor is compatible with the following Litetronics fixtures:

- LED Area Light Pro (ALP)
- LED High Bay Circular Pro (HBCP)
- LED Round High Bay Pro XL (HBX500)
- LED Linear High Bay Pro (LHBP)
- Linear High Bay (Gen 4) (LHB)
- Linear High Bay C-Series (LHBC)
- LED High Bay PL (Gen 3) (HBC)
- LED Round High Bay SL (Gen 3) (HBS)
- Square Garage Light (GL8)
- LED Area Light (AL)
- LED Flood Light (FL)
- LED Wall Packs (WPC & WPT)




APPLICATIONS

- Car dealership
- Schools, campuses, day care
- Parking lots
- Commercial
- Transportation hubs
- Trucking Depots
- Retail
- Event Centers
- Industrial yards and lots
- Warehouse/storage
- Gymnasiums
- Garages
- High ceilings
- Task lighting
- Building facades
- Loading dock and entry doors
- Safety & security lighting
- Schools, campuses
- Storage rental facilities
- Multi-family, apartment complex
- Columns & porte cochere
- Covered walkways
- Entranceways
- Canopies
- Soffits

FEATURES

- Plug-In
- Maximum operating height 50 ft. Max
- Detection coverage area 20 ft. (at 50 ft. height)
- -4°F to 140°F (-20°C to 60°C)
- Daylight Harvesting
- Occupancy Sensing
- IP65
- Dim control output 0-10V
- 5 year warranty
- White

SENSOR COVERAGE

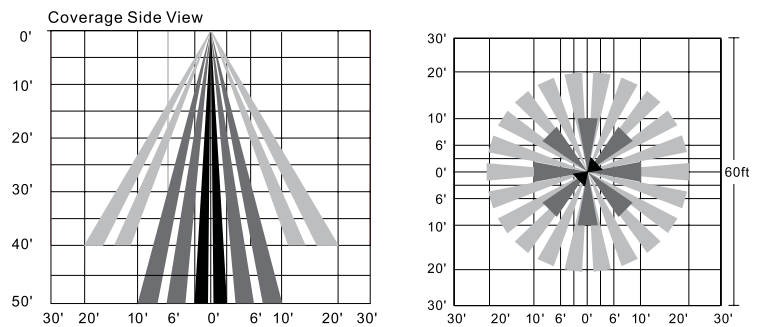

ORDERING INFORMATION

Listed below are the max load based mains voltage.

ORDERING CODE	DESCRIPTION	BASE	VOLTS
SC016	Plug-In PIR Sensor for up to 50 Ft. Max Mounting Height	Plug-In	12-24V DC

CERTIFICATIONS

