

## LED Linear Low Bay



### LED Linear Low Bays Offer a Fast ROI and Lasting Return

The new Litetronics Linear Low Bay offers 9,800 lumens, making it ideal for ceiling heights from 12-20 feet. With a diffuser lens to deliver uniform light and eliminate glare, the 75 Watt Low Bay offers 130 lumens/watt, providing a high efficiency solution for a variety of applications.

Designed for either pendant, chain or adjustable cable mounting, the two foot long Linear Low Bays are available with a 10 year warranty and 100,000 hour rated life. Offered with 0-10 dimming, the instant on fixtures are ideal for use with daylighting or proximity sensors. So make the move. The Litetronics Low Bays provide an excellent initial cost and a lifetime of significant energy savings.

#### Benefits

- 100,000-hour rated life; 10-year warranty
- 0-10V Dimming
- Installs in minutes
- Universal 120-277V
- DLC Premium
- Damp location rated

#### Markets & Applications

- Retail
- Warehouse
- Industrial
- Gyms
- Transit Facilities

**LITETRONICS®**

6969 W. 73rd St.  
Bedford Park, IL 60638  
[www.Litetronics.com](http://www.Litetronics.com)

# LED Linear

Low Bay

## Technical Product Information

**Average Rated Life:** 100,000H



**Line Frequency:** 50/60Hz

**CRI:** 80

**Power Factor:**  $\geq 0.9$

**Operating Temp:** -4° to 104°F

**Available by Special Order:** 3000K

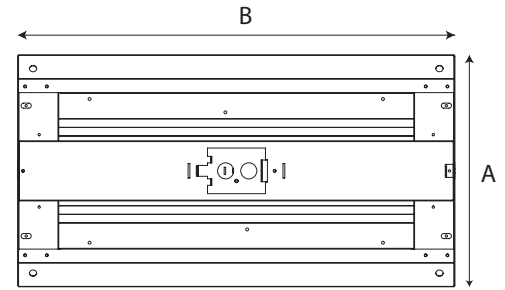

## Sizing

PART	A	B	C	D
75 Watt	12.60"	23.82"	1.97"	3.78"

## Part Number Matrix

XXX (product family)	XXX (wattage)	X (voltage)	X (size/shape)	X (lens)	XX (color temperature)	XX (dimming)
LLB = Linear Low Bay	075 = 75 watts	U = 120-277V	K = 2'x1'	2 = Polycarbonate Frosted	40 = 4000K 50 = 5000K	DL = 0-10V Dimming

## Product Specifications

TYPE	WATTS	VOLTS	DESCRIPTION	ORDERING CODE	CCT (K)	LUMENS	DLC
LOW BAY	75	120-277	75W WHT LED LB 120-277V PCFR 4000K 0-10V DIM	LLB075UK240DL	4000	9,800	PREMIUM
			75W WHT LED LB 120-277V PCFR 5000K 0-10V DIM	LLB075UK250DL	5000		

## What's included in the box with LED Linear Low Bay:

Installation Instructions • (2) V-hooks • (2) Chains • (5) Wire Nuts • (1) Junction Box • (2) Junction Box End Caps • (4) Junction Box Bolts • (4) Washers • (4) Lock Washers • (4) Junction Box End Cap Screws • (1) LED Linear High Bay or Low Bay • (1) 8 foot white cable with 3 conductors



# LED Linear

## Low Bay Accessories



A

IMAGE	WATTS	VOLTS	DESCRIPTION	ORDERING CODE	ACCESSORY USE	MODELS COMPATIBLE WITH
A	120-277V		LINEAR HIGH BAY KIT MOTION SENSOR IP65 1-10V DIM	LHBAS51	Microwave motion sensor, IP65, 1-10V and rating 400W@120Vac, 800W@220-277Vac (inductive) and HF system 5.8GHz±75MHz, ISM wave band. For indoor use only.	2' x 1' 2' x 1.5' 4' x 1.5'

