

## LED Strip Retrofit 4'



### **Our LED Strip Retrofit. Will Reduce Your Energy & Labor Costs & Give You the Look Of A New Diffuser Lens.**

If your fluorescent fixture is from 2.75"-5" wide, the adjustable Litetronics LED Strip Retrofit offers the fastest and least expensive way to upgrade to LED energy efficiency and the polished look of a new diffuser lens.

Our Strip Fixture Retrofit provides considerable installation savings compared to a new fixture. It uses the existing building wiring and fixture base frame. The assembly process is simple. Plus, there's less waste disposal, and no post- installation work needed to touch-up the ceiling paint.

The 10-year warranty and 100,000 hour-rated life eliminates parts and labor costs needed for fluorescent tube replacements. Plus, it eliminates ballast worries, and saves over 70% in energy costs compared to your existing fluorescent fixture.

#### **Benefits**

- 4' models
- 100,000-hour rated life
- 10-year warranty
- Installs in minutes
- Universal 120-277V
- Safe for food service applications
- 0-10V Dimming
- For single or continuous row mounting
- Adjustable for 2.75" - 5" wide housings
- Suitable for damp & dry locations
- DLC Premium rated

#### **Markets**

- Hospitality
- Hospitals
- Offices
- Warehouse
- Retail
- Schools

#### **Applications**

- Retail Floor
- Corridor Lighting
- Task Area
- Aisle Lighting

# LITETRONICS®

6969 W. 73rd St.  
Bedford Park, IL 60638  
[www.Litetronics.com](http://www.Litetronics.com)

# LED Strip Retrofit

4'

## Technical Product Information

**Average Rated Life:** 100,000H

**CRI:** 80

**Power Factor:**  $\geq 0.95$


**Weight:** 4' = 3.438 lbs.

**Beam Angle:** 110°

**Operating Temp.:** -4°F to 113°F

**Volts:** 120-277

**Dimming:** 0-10V

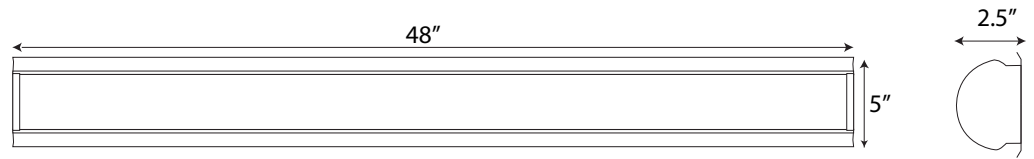


## Part Number Matrix

XX (product family)	XX (wattage)	X (voltage)	X (connector)	XX (shape)	XX (color temperature)	XX (dimming)
SR = LED Strip Retrofit	24 = 24 watts 30 = 30 watts	U = 120-277V	Q = QuickConnect	S4 = 4' Strip	35 = 3500K 40 = 4000K 50 = 5000K	DL = 0-10V Dimming


## Product Specifications

TYPE	WATTS	VOLTS	DESCRIPTION	ORDERING CODE	CCT (K)	LUMINAIRE LUMENS	DIMMING
4'	24	120-277	24W 4FT LED STRIP RETROFIT QC 3500K	SR24UQS435DL	3500	3,120	0-10V
			24W 4FT LED STRIP RETROFIT QC 4000K	SR24UQS440DL	4000		
			24W 4FT LED STRIP RETROFIT QC 5000K	SR24UQS450DL	5000		
	30		30W 4FT LED STRIP RETROFIT QC 3500K	SR30UQS435DL	3500	3,900	
			30W 4FT LED STRIP RETROFIT QC 4000K	SR30UQS440DL	4000		
			30W 4FT LED STRIP RETROFIT QC 5000K	SR30UQS450DL	5000		


## Special Features for Easy Install:

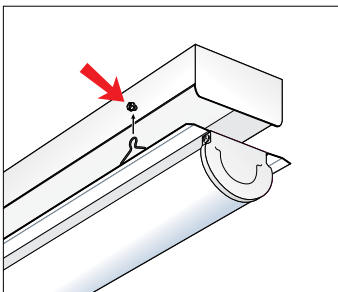

Mounting hooks easily help hang retrofit to become hands free to finish installation.

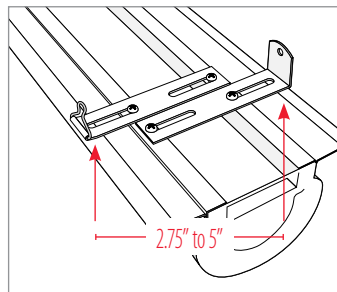

Hands are free to affix RetroFit mounting brackets into place. Groove in bracket reinforces strip wall for self-tapping screw insertion.

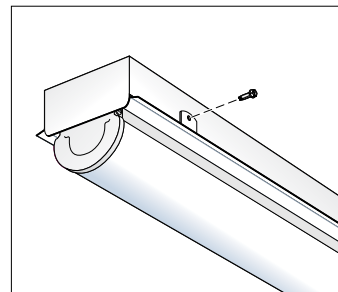

White mounting brackets attached to side of strip fixture for neat design.

