

LED Decorative™ C11, CA11, G25



An energy-efficient alternative to incandescent bulbs, the LED Decorative™ line of light bulbs is ideal for most decorative lighting fixtures. The clear candles feature a unique omni-directional lens that replicates the look of an incandescent filament and allows light output in all directions - great for chandeliers, or fixtures where ambient light in all directions is important. The frosted candles have an ultra-wide light spread that replicates the ambient light of an incandescent bulb. The G25 finishes off the line offering powerful, directional light, ideal for hanging pendant fixtures, or anywhere traditional globe light bulbs are used. All bulbs feature excellent dimming capability just like their incandescent counterparts, yet unlike incandescent bulbs, they use 85% less energy and last up to 17 times as long.

Benefits

- 25,000-hour life
- Dimmable
- Instant-On™, Instant-Bright™
- RoHs Compliant; Mercury and Lead-Free
- Up to 85% energy savings compared to incandescent
- Meets ANSI specifications; fits in standard fixtures
- Clear and frost finishes available (G25, frost only)
- Reduces replacement and maintenance costs
- 3-year warranty

Markets & Applications

- Restaurants
- Hospitality
- Cinemas
- Bathrooms
- Chandeliers
- Decorative Lighting
- Wall Sconces
- Pendant Lights
- Vanities

Comparison Chart

LED	=	INCANDESCENT
5-watt	=	25-watt
7-watt	=	40-watt
10-watt	=	60-watt

LITETRONICS®

6969 W. 73rd St.
Bedford Park, IL 60638
www.Litetronics.com

LED Decorative™ C11, CA11, G25

Technical Product Information

Rated Life: 25,000 H

Voltage: 120V

Line Frequency: 60Hz


CRI: 83¹

Compatible Dimmers

Available online at: Litetronics.com

Other Colors Available:

4000K

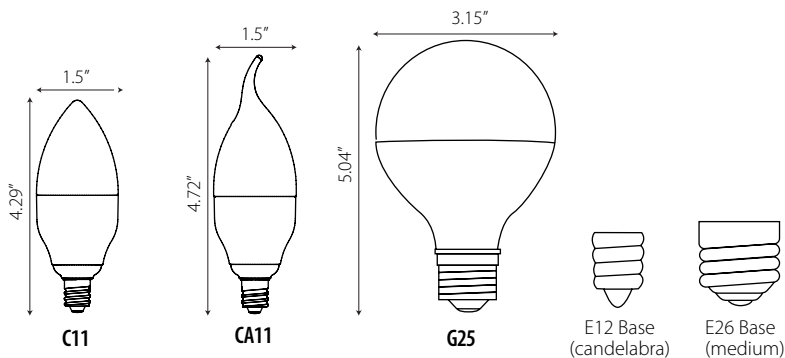

SHAPE	WATTS	DESCRIPTION	ORDERING CODE	CASE QUANTITY	FINISH	CCT (K)	LUMENS	LUMENS PER WATT
C11	5	5W C11 CAND 120V CL	LD0527CL2D	10	CLEAR	2700	300	60
	5	5W C11 CAND 120V FR	LD0527FR2D	10	FROST	2700	325	65
	5	5W C11 CAND 120V FR	LD0527FR4D	10	FROST	3000	325	65
CA11	5	5W CA11 CAND 120V CL	LD0528CL2D	10	CLEAR	2700	300	60
	5	5W CA11 CAND 120V CL	LD0528CL4D	10	CLEAR	3000	300	60
	5	5W CA11 CAND 120V FR	LD0528FR2D	10	FROST	2700	325	65
	5	5W CA11 CAND 120V FR	LD0528FR4D	10	FROST	3000	325	65
G25	7	7W G25 MED 120V FR	LD07536FR7D	6	FROST	5000	550	75
	10	10W G25 MED 120V FR	LD10536FR4D	6	FROST	3000	800	80
	10	10W G25 MED 120V FR	LD10536FR7D	6	FROST	5000	850	80

Energy Star qualified



LITETRONICS®