

LED VAPOR TIGHT STRIP



IP67 and IK10 ratings plus corrosion resistance make this the toughest fixture around.

Uniquely rugged and slim, the Litetronics LED Vapor Tight Slim Strip Light works where few other lighting products can. Only 1.5 inches in diameter, this DLC Premium product is both IP67 and IK10 rated. Suitable for both indoor and outdoor use, this corrosion-resistant fixture is well-suited for harsh industrial environments like food-service and factory environments as well as warehouses.

Offering 130 lumens per watt, and a beam angle of 120°, the Vapor Tight Slim Strip Light features a highly transparent cover. With compact stainless steel hardware for mounting the fixture on walls or ceilings, the product is well-suited for applications where only limited space is available.

KEY FEATURES

- IP67 Rated
- DLC Premium listed
- IK10 Rated
- Connectivity between fixtures
- 4' & 8' models
- 130 lpw
- 5 year warranty
- Corrosion resistant
- Non-dimmable
- 5' cable attached
- 100-277V
- Stainless steel wall/ceiling mount accessories standard

MARKETS

- Commercial
- Warehouse
- Retail
- Schools
- Health Care
- Gas Stations
- Factories

APPLICATIONS

- Corridor Lighting
- Halls
- Storage Areas
- Stairways
- Parking Lots
- Car Washes



LED VAPOR TIGHT STRIP

SPECIFICATIONS

Average Rated Life: 50,000H

CRI: 80

Mounting: Stainless steel brackets

Power Factor: ≥0.91



Volts: 120-277

Beam Angle: 120°

IP Rating: 67

IK Rating: 10

Operating Temperature: -22°F to 113°F

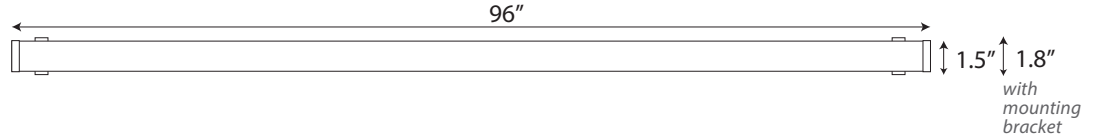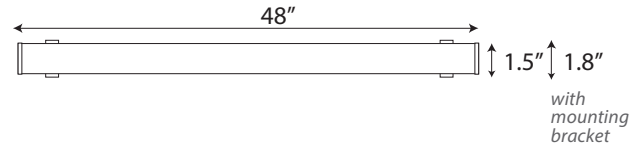


CONNECTABILITY

The 4' model can be daisy chained, enabling coverage of a larger area from one power source.

Max number of fixtures that can be connected:

| WATTS | MAX QUANTITY IN DAISY CHAIN |
|-------|-----------------------------|
| 30 | 33 |

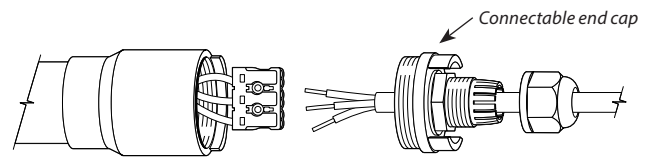


Above: The stock end cap has been removed and replaced with the connectable end cap, facilitating the connection between two fixtures while maintaining the same protection from the elements.

ORDERING INFORMATION


| TYPE | WATTS | VOLTS | ORDERING CODE | DESCRIPTION | CCT (K) | LUMENS |
|------|-------|---------|---------------|--|---------|--------|
| 4' | 30 | 120-277 | VT30US440P | 30W 4' LED VAPOR TIGHT 120-277V 4000K PREM | 4000 | 3,900 |
| | | | VT30US450P | 30W 4' LED VAPOR TIGHT 120-277V 5000K PREM | 5000 | |
| 8' | 55 | | VT55US840P | 55W 8' LED VAPOR TIGHT 120-277V 4000K PREM | 4000 | 7,150 |
| | | | VT55US850P | 55W 8' LED VAPOR TIGHT 120-277V 5000K PREM | 5000 | |

ACCESSORIES

VTAM01



VTAM02



| IMAGE | ORDERING CODE | DESCRIPTION | ACCESSORY USE |
|-------|---------------|-------------------------------------|--------------------------------------|
| A | VTAM01 | 4' VAPOR TIGHT SUSPENSION MOUNT KIT | Used to suspend 4' Vapor Tight light |
| B | VTAM02 | 8' VAPOR TIGHT SUSPENSION MOUNT KIT | Used to suspend 8' Vapor Tight light |