

BLUETOOTH PIR SENSOR WITH IR

DESCRIPTION

The Litetronics Bluetooth PIR Sensor with IR is designed for commercial indoor and outdoor luminaires requiring wet location protection. Providing reliable, fixture-level performance and durable operation in demanding environments.

The SC011 sensor enables wireless control of fixtures, or groups of fixtures, through the LiteSmart mobile app.

This plug-in sensor is compatible with Litetronics LED Round High Bay SL Gen 3.



APPLICATIONS


- Schools, campuses
- Commercial
- Retail
- Event Centers
- Warehouse/storage
- Building facades
- Loading dock and entry doors
- Safety & security lighting
- Storage rental facilities
- Columns & porte-cochère
- Covered walkways
- Entranceways
- Canopies
- Soffits

FEATURES


- Plug-In
- Daylight Harvesting
- Occupancy Sensing
- Bluetooth transmit 328 ft. Max
- IP66/Wet Location Rated
- Maximum operating height 40 ft. Max
- Detection coverage area 40-80 ft. Max
- UV-rated Nylon housing
- Operating Temperature
-22°F to 131°F (-30°C to 55°C)
- 5 year warranty
- Black

SENSOR COVERAGE

Coverage Side View

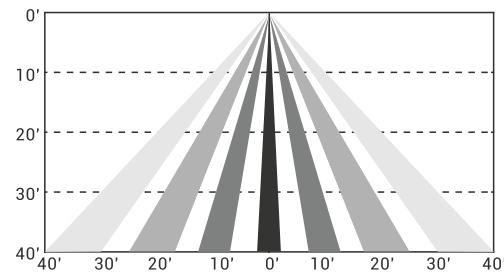

Coverage Top View

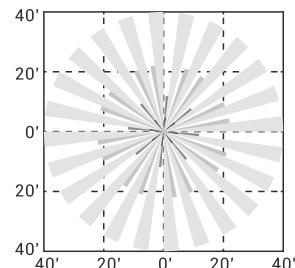

ORDERING INFORMATION

Listed below are the max load based mains voltage.

ORDERING CODE	DESCRIPTION	BASE	VOLTS
SC011	Plug-In Bluetooth PIR Sensor with IR for Outdoor	Plug-In	12V DC

CERTIFICATIONS

