

PROJECT:	
CATALOG #	
TYPE:	DATE:

## BLUETOOTH CONTROL SWITCH

### DESCRIPTION

The BCS05 7-Key Scene Controller is the perfect Bluetooth wireless AC powered wall switch. It offers advanced control over 4 scene functions, including power on/off, and dimming. Initial setup is handled via LiteSmart, as well as admin-level changes to group settings, but everyday functionality is handled by the occupants.

Compatible with LiteSmart IR sensor products (Specified Pre-Installed Panels & Kits) and Pluggable High Bay Sensor SC008.



### FEATURES

- Bluetooth network technology enables the switch to be linked to one or more light groups via LiteSmart phone App
- Easy installation
- Manual On/Off/Dim & 4 scenes control of any connected load

### CERTIFICATIONS

### ORDERING INFORMATION

ORDERING CODE	DESCRIPTION	VOLTS	WATTAGE	BLUETOOTH TRANSMIT
BCS05	7 BUTTON AC POWERED WALL SWITCH 120-277V	120-277V	.07W	100 ft. Max

### SPECIFICATIONS

**Warranty:** 5 years

#### PERFORMANCE

**Operating temp:** 32°F-104°F (0°C to 40°C)

#### ELECTRICAL

**Input voltage:** AC 120-277V

**Bluetooth transmit:** 100ft Max

**Input frequency:** 50/60Hz

**Wire Length:** 5/8"

**Sensor:** Yes

#### PHYSICAL

**Color:** White

**Housing Material:** Aluminum

#### INDUSTRY STANDARDS/RATINGS

**IP:** 20

**Location:** Indoor use only

**IC:** N/A

**UL/ETL:** UL



**FCC:** Yes

**RoHS:** Yes

**DLC:** Yes

## DIMENSIONS / WEIGHT

ORDER#	LENGTH	WIDTH	HEIGHT
BCS05	2.6"	1.3"	1.7"

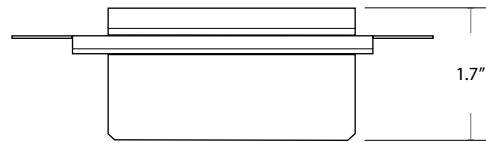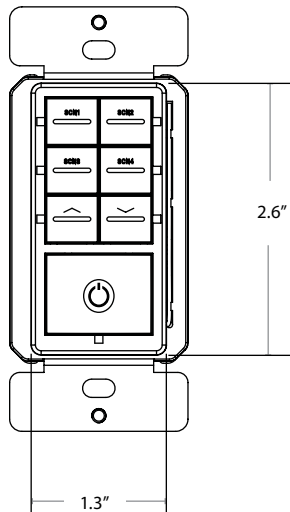


## BSC05 REFERENCE MATERIAL

### INSTALL GUIDE



## LITESMART APP

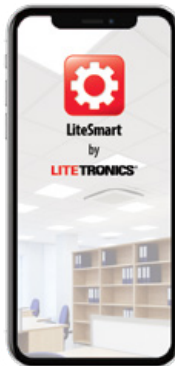

*Set up and manage your space with LiteSmart.*



# LITESMART

LiteSmart is a mobile app that enables total management of lighting systems at the touch of your fingers.

**DOWNLOAD NOW!**

