


LITE TRONICS®

Strip Fixture Wire Harness Connecting Kit


Installation Instructions for

Inter-Connecting 4' Kit (SFAM06) and 8' Kit (SFAM07)

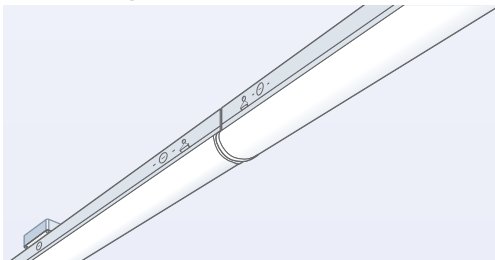

WHAT COMES IN THE BOX

Linear Strip Fixture Harness Connecting Kit comes with the following standard parts:



(1) 4' or 8' Harness





(2) Self-Adhesive Cable Ties-4'
(4) Self-Adhesive Cable Ties-8'





(2) Split Grommets

*Before Installation, carefully remove all parts from the packaging.
Inspect product for defects due to shipping.
Refer to Strip Fixture Installation Instructions for reference.*




1. Turn off power at electrical panel.
2. Remove the screws from bracket side to allow the lamp to hang freely from the clips attached to the fixture to expose wiring.





3. Connect wires from incoming power and lamp to harness:

Black = AC Line (L)
White = AC Neutral (N)
Green = Ground ($\perp$)



Purple = D + (L)
Gray = D - (N)





4. Remove knockout at end of fixture and feed female side of harness through hole. Place split grommet over wires and insert into opening.



5. Remove knockout at end of the next inline Strip Fixture. Feed female side of harness through the hole and place 2nd split grommet over wires and insert into opening.
6. Mate the female side to the male side of 2nd harness inside of next fixture.



7. Connect lamp wires to harness based on Step 3.



8. Use self-adhesive cable ties (included) to secure harness wires inside fixture to prevent from hanging excess. Close and secure both Strip Fixtures with screws. Adjust and align both units. Turn on the power and you are done.

Continuous Mounting

The Strip Fixture can be continuously mounted from one power source. Below are the total units that can be connected per wattage setting.

			How many required	
Length	Watts	Max can be connected in row	SFAM06	SFAM07
106	15	53	52*	
88	18	44	43*	
80	20	40	39*	
64	25	32	31*	
108	30	27	26	
80	40	20	19	
128	46	16		16
60	50	15	15	15
96	60	12		12
80	70	10		10
72	80	9		9
* for SFS2 (2ft fixture) use SFAM06 of 4' length if required.				

Thank you for choosing

LITETRONICS®

6969 W. 73rd Street
Bedford Park, IL 60638

www.Litetronics.com

CustomerService@Litetronics.com or 1-800-860-3392



The information and product specifications contained in these instructions are based upon data believed to be accurate at the time of printing. This information is subject to change without notice and without incurring liability. If you have questions regarding specific product details, please contact us at 800-860-3392 or via email at customerservice@litetronics.com.

To check for an updated version of these instructions, please visit www.litetronics.com.